



For Powerful Digital Marketing and Total Multimedia Solution

---

**DV-66K**

**User's Guide**

(HW V2.0) Latest Version July 2007

## **Acknowledgements**

The MedeaWiz logo and DV-66K are trademarks of MedeaWiz Corporation. All other trademarks or registered trademarks are acknowledged as the exclusive property of their respective owners.

## **Notice**

The information contained in this document is subject to change without notice.

MedeaWiz Corporation makes no warranty of any kind with regard to this material, including, but not limited to, the implied warranty of merchantability and fitness for a particular purpose.

MedeaWiz shall not be liable for any errors or for incidental or consequential damages in connection with the furnishing, performance, or use of this material.

All rights reserved. Reproduction, adaptation, or translation of this manual is prohibited without prior written permission of MedeaWiz Corporation, except as allowed under copyright laws.

No part of this document may be photocopied, reproduced, or translated to another language without the prior written consent of MedeaWiz Corporation.

© MedeaWiz Corporation 2007




## DV-66K, Keypad Controller

Operating Voltage	3 - 5.5V
Operating Temperature	32 - 140°F (0 - 60°C)
Serial Port Specs	Baud rate 4800 bits/sec, Null check, 8 bits, 1 stop bit
Dimensions	2.06"(L) x 2.56"(W) x 0.62"(H)

Note: Space bit always set to zero (Space bit = 0)


### Data Timing Chart:

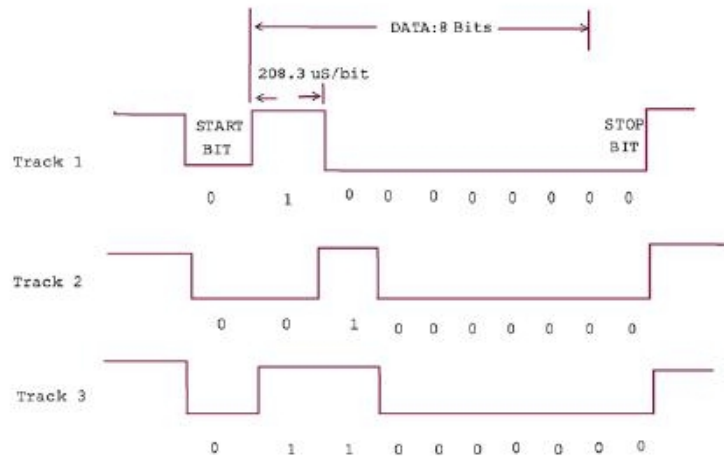



Pin	JP	Cable	Function
1	JP2	DV-66K	Ground
2	JP2	DV-66K	TX
3	JP2	DV-66K	RX
4	JP2	DV-66K	+5 VDC

**Aerial View:**

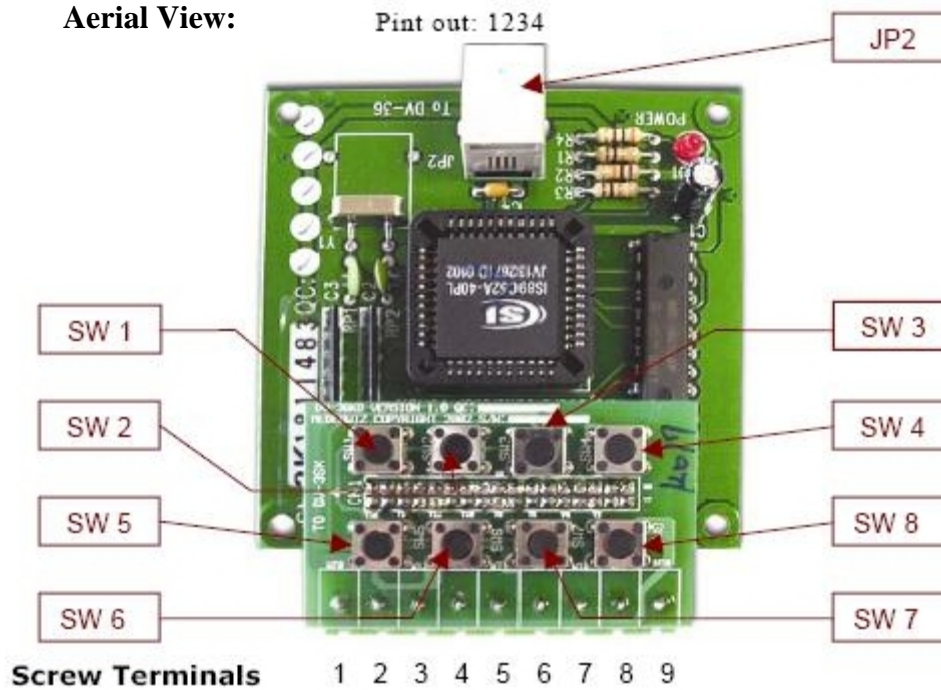

Pin	Description
Pin 1	Common
Pin 2	Switch 1, Track #1
Pin 3	Switch 2, Track #2
Pin 4	Switch 3, Track #3
Pin 5	Switch 4, Track #4
Pin 6	Switch 5, Track #5
Pin 7	Switch 6, Track #6
Pin 8	Switch 7, Track #7
Pin 9	Switch 8, Track #8

**Front View:**



**Pin Out: 4 3 2 1**